

# MM 5040


## Intrinsically Safe Current Loop Isolator Dual Channel

Intrinsically safe  
SAFETY SYSTEMS




### DESCRIPTION:

The intrinsically safe isolation amplifier is designed for galvanic separation of the control signal from the devices intended for its processing. The MM 5040 includes a fully floating power supply designed to power and transmit analog signals of two-wire converters with a 4-20 mA analog input signal, and a 4-20 mA output for the second channel. Its design complies with the European standards EN 60079-0/60079-11. The amplifier is placed in a plastic housing adapted for mounting on a DIN 35 rail.

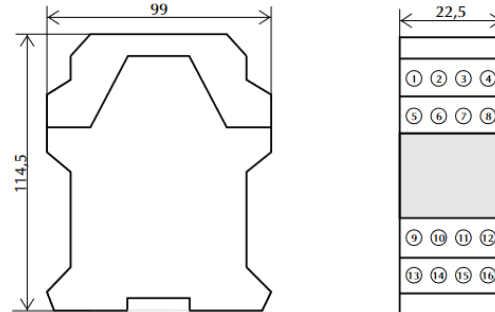

### PRODUCT FEATURES

- Intrinsically safe inputs/outputs
- Dual Channel Isolation Amplifier
- galvanic separation of input and output circuits
- galvanic separation of supply voltage from input and output circuits
- universal (active/passive) inputs and outputs

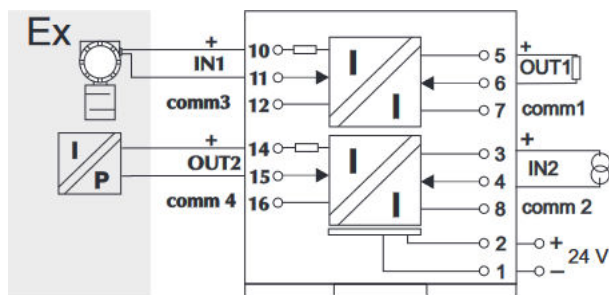

### CONNECT:

- 1 - -Ucc/N (24/12V DC power supply)/230 V AC
- 2 - +Ucc/L (24/12V DC power supply)/230 V AC
- 3 - input 2 (+)
- 4 - input 2 (-)
- 8 - input 2 (comm 2)
- 5 - output 1 (+)
- 6 - output 1 (-)
- 7 - output 1 (comm 1)
- 10 - input 1 (+)
- 11 - input 1 (-)
- 12 - input 1 (comm 3)
- 14 - output 2 (+)
- 15 - output 2 (-)
- 16 - output 2 (comm 4)

# MM 5040

## Intrinsically Safe Current Loop Isolator Dual Channel

Intrinsically safe  
SAFETY SYSTEMS



Technical parameters:

<b>Exemplary Marking</b>	MM 5040 AC (230V)	MM 5040 DC (24 V)
<b>Power Supply</b>		
Voltage	230 V <sub>AC</sub>	20-35 V <sub>SS</sub>
Frequency	50 Hz	N/A
Power	max 2,7 W for 24V/20mA	max 2,7 W for 24V/20mA
Galvanic separation	Input from output and power	Input from output and power
<b>Number of channels</b>	2	2
<b>Inputs and Outputs parameters</b>		
Hazardous Zone Output	0/4 - 20mA, 16 V przy 20 mA or chosen by user	0/4 - 20mA, 16 V przy 20 mA or chosen by user
Input From Hazardous Zone	0/4 - 20mA, 24 V or chosen by user	0/4 - 20mA, 24 V or chosen by user
Intrinsically safe Circuit	28V, 300 Ω, 93 mA	28V, 300 Ω, 93 mA
Input – Output Isolation	2,5kV (EN 60079-0/60079-11)	2,5kV (EN 60079-0/60079-11)
Accuracy (as required)	0,2 lub 0,05% from range	0,2 lub 0,05% from range
Temperature drift	0,8 μA/°C (0/4 - 20mA)	0,8 μA/°C (0/4 - 20mA)
<b>LED indication</b>		
Power Supply	Green	Green
<b>Environmental Class</b>	II 2 G /Ex ia Ga/ IIC, II 1 G /Ex ia Ga/ IIC, I M1 /Ex ia Ma/ I	II 2 G /Ex ia Ga/ IIC, II 1 G /Ex ia Ga/ IIC, I M1 /Ex ia Ma/ I
<b>Housing</b>		
Dimensions	99mm x 22,5mm x 114,5 mm (HxWxD)	99mm x 22,5mm x 114,5 mm (HxWxD)
Housing type	16-contacts	16-contacts
Material	polycarbonate/ABS	polycarbonate/ABS
Mount	DIN 35	DIN 35
Connect	Screws/ Contacts	Screws/ Contacts
IP Rating	IP20	IP20